


SUPRA

SURFACE ROUND LED FITTING



MARKS, SYMBOLS & ICONS

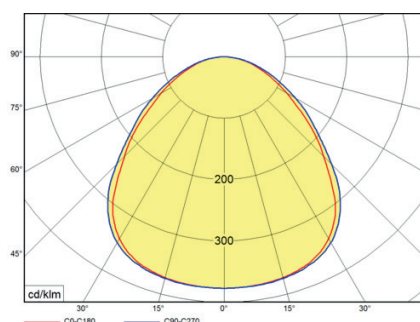

European
Branded Driver

GENERAL DATA

Order code: **AP-SM28/4**

Colours: **White**

Body: **White painted (RAL 9003) metal sheet**

Optic: **Translucent acrylic layer with a microprismatic cover**

Mounting: **Surface mounted**

LED: **Mid Power LED**

Weight: **2kg**

Size: **Ø 370mm**

Wiring: **DALI option on request
AVANTI Smart incorporating
Casambi technology
available on request**

PHOTOMETRICAL PARAMETERS

L80:B50

ELECTRICAL SPECIFICATIONS

Input: **220-240 VAC**

Power: **28W**

Power Factor: **0.95**

IP Grade: **IP 20**

Insulating
Class: **I**

LED SPECIFICATIONS

CRI:
(Colour Rendering Index) **Ra ≥80**

Lumen: **2600 lm**

CCT:
(Correlated Colour Temp.) **4000K Natural white
3000K on request**

Maximum
Life Time **50.000 hours**

NOTES

Microwave Sensor option AP-SM28/4MD
3 Hour emergency version AP-SM28/4M3