

5W RECESSED EMERGENCY FITTING


Designed for illumination of escape routes and emergency exits during the failure of mains power.



MARKS, SYMBOLS & ICONS



*Full warranty policy details are available upon request and are also viewable on our website.
(Excludes battery pack)

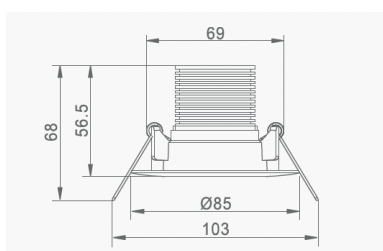

GENERAL DATA

Order code: **AP-STARWH-SO5W**

Colours: **(B) White**

Body: **Aluminium enclosure**

Mounting: **Recessed**

Product: **LED 5W**

Lens: **SO (Open Area Lens)**

Weight: **0.8kg**

Operating Mode: **Maintained/
Non-maintained**

Operation duration: **3 hours**

Size: **Ø 85mm**

Test: **Manual**

Temperature working range: **10°C - 55°C**

CCT: **4000K**
(Correlated Colour Temp.)

Maximum Life Time: **35.000 hours**

ELECTRICAL SPECIFICATIONS

Input: **230V / 50HZ**


Power: **5W**

IP Grade: **IP 20**

Insulating Class: **I**



5 Year
Warranty*

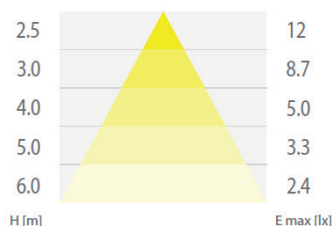

5W RECESSED EMERGENCY FITTING


Designed for illumination of escape routes and emergency exits during the failure of mains power.



MARKS, SYMBOLS & ICONS



*Full warranty policy details are available upon request and are also viewable on our website.
(Excludes battery pack)

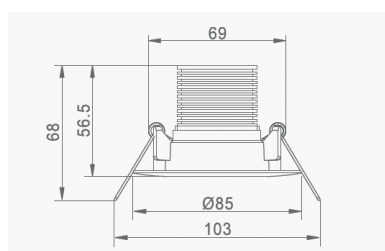

GENERAL DATA

Order code: **AP-STARWH-SC5W**

Colours: **(B) White**

Body: **Aluminium enclosure**

Mounting: **Recessed**

Product: **LED 5W**

Lens: **SC (Corridor Lens)**

Weight: **0.8kg**

Operating Mode: **Maintained/ Non-maintained**

Operation duration: **3 hours**

Size: **Ø 85mm**

Test: **Manual**

Temperature working range: **10°C - 55°C**

CCT: **4000K**
(Correlated Colour Temp.)

Maximum Life Time: **35.000 hours**

ELECTRICAL SPECIFICATIONS

Input: **230V / 50HZ**

Power: **5W**

IP Grade: **IP 20**

Insulating Class: **I**



5 Year
Warranty*

