

RAPIDE

IP65 LED surface mounted non-corrosive fitting



TECHNICAL SPECIFICATION

Order codes:

4ft 1x24W: AP-RAP124/LED/850
 4ft 2x24W: APRAP224/LED/850
 5ft 1x40W: AP-RAP140/LED/850
 5ft 2x40W: AP-RAP240/LED/850
 6ft 1x48W: AP-RAP148/LED/850
 6ft 2x48W: AP-RAP248/LED/850

Application: Industrial areas,
Garages and workshops

Polycarbonate base

Polycarbonate controller and
stainless steel clips.

Construction: Aluminium gear tray retained on
straps for ease of installation.

Supplied complete with suspension
eyes and stainless steel mounting
brackets.

CCT(K): 5000K - CRI >.8


Lumen Output:

4ft 1x24W: 2700 lm
 4ft 2x24W: 5125 lm
 5ft 1x40W: 4480 lm
 5ft 2x40W: 8305 lm
 6ft 1x48W: 5185 lm
 6ft 2x48W: 10350 lm

Maximum Life Time: 50,000 hours

MARKS, SYMBOLS & ICONS

CE RoHS IP65 IK10

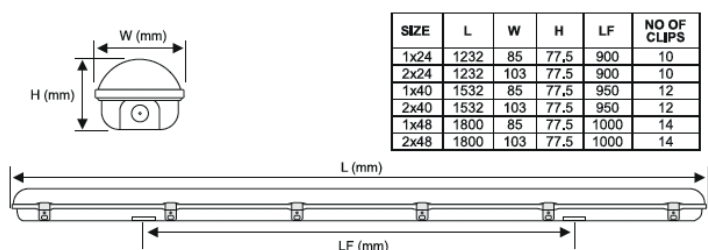

OPTIONS

- Emergency (maintained 3 hours) version available. Add suffix /EM
- Microwave sensor and PIR versions available
- Dimming versions available

*Full warranty policy details are available upon request and are also viewable on our website.