

UGR<19 Recessed LED Panel with micro-prismatic diffuser



TECHNICAL SPECIFICATION

Order code: **LIN/MP/66/840**

Application: **General commercial use**

Size mm: **595 x 595 x 32**

Construction:

- Side-lit design with LEDs housed in frame
- MS Light Guide Plate
- UV stable PS Micro-prismatic diffuser (for UGR<19 compliant lighting schemes)

Diffuser **UGR<19 Micro-prismatic**

LED driver: **Flicker free, remote mounted LED driver**

CCT(K): **4000K - CRI >80**

Lumen Output: **3460 lm**

Maximum Life Time: **20,000 hours**


OPTIONS

Surface Mount Kit for 600X600 Panel - **CEL/SMF/66**
Wire Suspension Kit - **TIA/SUSP**
EMERGENCY PACK - **EMR/REC**

MARKS, SYMBOLS & ICONS



EMERGENCY CONVERSION KIT
WITH LITHIUM BATTERY

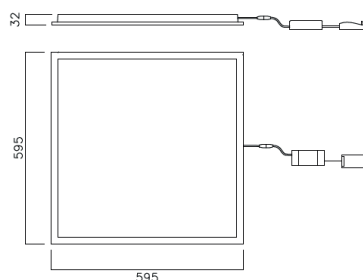

*Full warranty policy details are available upon request and are also viewable on our website.