

## LED FLOODLIGHT

The LED Floodlight is available with multiple beam angles, control and wattage options.



### MARKS, SYMBOLS & ICONS

CE F IP66 IK07



5 Year  
Warranty\*

\*Full warranty policy details are available upon request and are also viewable on our website.

### GENERAL DATA

Surface Protection: **Powder Coating**

Housing Colour: **Black**

Material: **Aluminium**

Lens: **Refractor Lens**

Ambient Temp Range: **-30 °C to 40 °C**

Cover Material: **Transparent Glass**

Dimmable: **No**

Short Circuit Protection: **Yes**

Light Distribution: **Asymmetric**

### ELECTRICAL SPECIFICATIONS

Input: **100-240 VAC**

IP Grade: **IP 66**

Electrical Class: **I**

Power Factor: **0.9**

Energy Efficiency: **A++, A+, A (LED)**


### LED SPECIFICATIONS

CRI: **Ra ≥80-89**  
(Colour Rendering Index)


Rated Life (Hrs): **50.000**

CODE	WATTS	LUMENS	Colour Temp	Dimensions (mm)	Weight
AP-FLOOD45	45	6250	4000K	300 x 240 x 69	2.9kg
AP-FLOOD95	95	12500	4000K	335 x 296 x 71	4.5kg
AP-FLOOD140	140	18750	4000K	375 x 320 x 75	5.2kg
AP-FLOOD185	185	25000	4000K	400 x 345 x 78	6.2kg
AP-FLOOD280	280	37500	4000K	455 x 410 x 83	9.4kg


# LED FLOODLIGHT

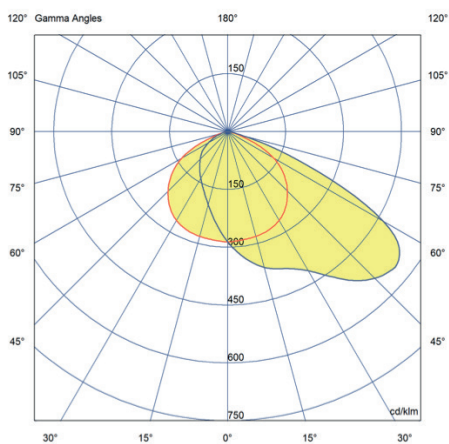

AP-FLOOD45



AP-FLOOD95



## ACCESSORIES


AP-POLE-42  
42mm Pole Mount Bracket

AP-POLE-60  
60mm Pole Mount Bracket

AP-POLE-76  
76mm Pole Mount Bracket



AP-FLOOD140 / 185



AP-FLOOD280

