


A classic spherical luminaire with two outputs, ideal for pedestrian areas, parks and walkways.


- Galvanised steel housing with high quality tempered glass and chrome reflector.
- Optical lenses offering visual comfort and uniform light distribution.
- High quality LED chips and DALI driver as standard, with in-built surge protection up to 20KV.
- UV protected pure polyester powder coated housing offering high corrosion resistance.
- Suitable for use with a range of controls and remote management systems.
- All external screws are 304 stainless steel as standard.
- RAL9005, other RAL colours available on request.



AP-L-MON-40



AP-L-MON

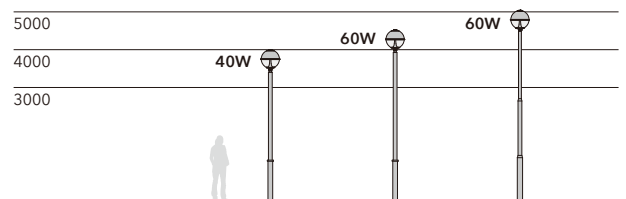

CODE	POWER	LED PCS	CCT	LUMEN OUTPUT	CRI	BEAM ANGLE	IP	IK	WARRANTY
AP-L-MON-40-T32B	40W	128	4000	5640	>70	T32B	IP65	IK09	8 year
AP-L-MON-60-T32B	60W	128	4000	8410	>70	T32B	IP65	IK09	8 year