


WPS

SLIMLINE WALLPACK

Robust and resilient, the WPS range of wallpacks is suitable for any exterior area lighting application. The slimline design can also be supplied with integral emergency and photocell options.

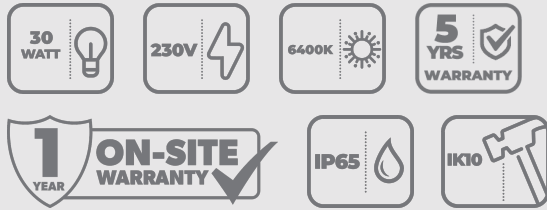

Features

- Shallow profile design
- Tough IK10 rated die-cast aluminium housing and polycarbonate diffuser
- IP65 for exposed outdoor environments
- Integral photocell provides automatic dusk to dawn operation



Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
AP-WPS30	30W WPS Slimline Wallpack	2600lm		30W	87 lm/W
AP-WPS30EM	30W WPS Slimline Wallpack with Emergency	2600lm	220lm	30W	87 lm/W
AP-WPS30PC	30W WPS Slimline Wallpack with Photocell	2600lm		30W	87 lm/W
AP-WPS30PCEM	30W WPS Slimline Wallpack with Photocell Emergency	2600lm	220lm	30W	87 lm/W

Product Information

Warranty	5 Years
On-Site Warranty	1 Year
Colour Appearance (CCT)	6400K
IP Rating	IP65
IK Rating	IK10
Voltage	230V
Material (Body/Housing)	Die-Cast Aluminium
Material (Diffuser/Cover)	Polycarbonate
Colour Rendition (CRI)	Ra >80

Colour Finish	Black
LED Life Expectancy	L70B50 50,000 Hours
Power Factor	>0.9
Frequency	50/60Hz
Driver Type	Fixed Output
Approval	UKCA CE
Electrical Class	Class I
Working Temperature	-20°C to 45°C

WPS

SLIMLINE WALLPACK

Packaging Information

Dimensions (mm)	L: 309 x W: 264 x D: 115 mm
Product Net Weight (kg)	1.8 kg
Barcode	5055807617673
Box Dimensions (mm)	L: 320 x W: 365 x D: 165 mm
Box Gross Weight (kg)	2.3 kg

Units/Outer Carton	6
Outer Carton Barcode	15055807617670
Outer Carton Dimensions (mm)	L: 660 x W: 515 x D: 390 mm
Outer Carton Gross Weight (kg)	15.1 kg

