


| | |
|----------------------------|------------------------------|
| Product Description | 5ft Arrow NX NCF-power shift |
|----------------------------|------------------------------|

| Technical Specs & Notes | | |
|-------------------------------|--|---|
| Product Code | AP-SARN/5/WS/WH /840 | AP-SARN/5/WS/M3/WH /840 |
| Description | Arrow NX LED NCF, 1.5m, 28-50W, 4400-7100lm, 4000K, IP65 | Arrow NX LED NCF, 1.5m, 28-50W, 4400-7100lm, 4000K, IP65, Emergency |
| Input Voltage | 220-240V AC | 220-240V AC |
| Total Wattage | 28/36/42/50W | 28/36/42/50W |
| Luminaire Lumens | 4400/5300/6200/7100 LM | 4400/5300/6200/7100LM |
| Lumens P/Watt | 138lm/W | 138lm/W |
| LED Chips | 2835/230pcs | 2835/230pcs |
| LED Forward Voltage | 138V/350mA | 138V/350mA |
| LED Chip Lifetime (L70) | 50,000H | 50,000H |
| CCT / CRI / SDCM | 4000K/80/<6 | 4000K/80/<6 |
| Driver | Tridonic 28004925 | Tridonic 28004925 |
| Power Factor | 0.89/0.92/0.94/0.95 | 0.86/0.9/0.925/0.94 |
| Running Current | 136/161/191/220mA | 145/170/199/229mA |
| Inrush Current | 6.9A/ 58 μs | 6.9A/ 58 μs |
| Sensor / PIR | NA | NA |
| Emergency Converter | NA | Seatronics: SL01-C550A-Li01-EL |
| Emergency Duration | NA | 3hours |
| Emergency Lumens | NA | >200lm |
| Battery | NA | LiFePO4 3.2V 3Ah |
| Material / Finish (RAL) | PC base & opal PC diffuser | PC base & opal PC diffuser |
| Class / IP / IK | Class I/IP65/IK08 | Class I/IP65/IK08 |
| Beam Angle | 118 | 118 |
| Glow Wire Testing (TP rating) | 850°C | 850°C |
| Installation Method | Ceiling mounting | Ceiling mounting |
| Temperature | -10 to 40°C | 0 to 40°C |
| Warranty | 3 Years | 3 Years(Battery 2 years) |
| Certificates | CE | CE |

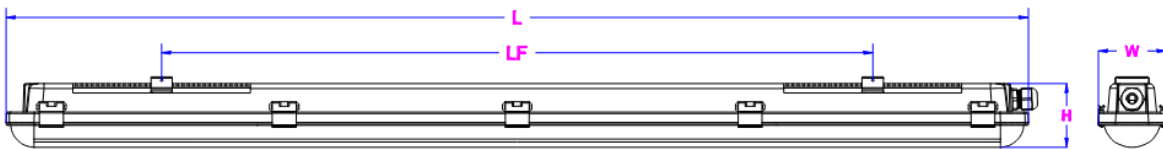

| Size | 2FT | 4FT | 5FT |
|--------|-----|------|------|
| L(mm) | 685 | 1185 | 1485 |
| LF(mm) | 400 | 700 | 1000 |
| W(mm) | 76 | 76 | 76 |
| H(mm) | 72 | 72 | 72 |