
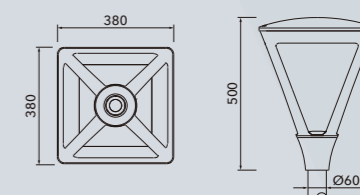


Contemporary and stylish luminaire available in a range of outputs. Ideal for pedestrian areas, terraces and general open spaces.

- Die-cast aluminium housing with super white tempered glass and polycarbonate reflector.
- Optical lens offering visual comfort and uniform light distribution.
- High quality LED chips and DALI driver as standard, with in-built surge protection up to 20KV.
- Suitable for pole mounting on Ø60mm poles.
- UV protected pure polyester powder coated housing offering high corrosion resistance.
- Suitable for use with a range of controls and remote management systems.
- All external screws are 304 stainless steel as standard.
- RAL9005, other RAL colours available on request.

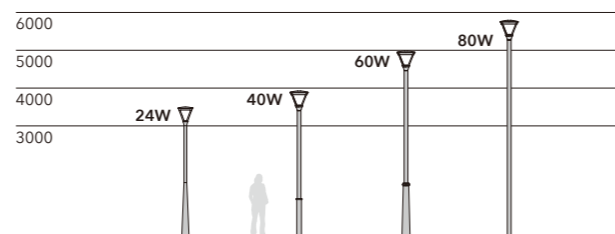

AP-L-VAS

CODE	POWER	LED PCS	CCT	LUMEN OUTPUT	CRI	BEAM ANGLE	IP	IK	WARRANTY
AP-L-VAS-S24-T1	24W	16	3000/4000	3150/3320	>70	T1	IP66	IK09	8 year
AP-L-VAS-S24-T2W				3120/3260		T2W			
AP-L-VAS-S40-T1	40W	24	3000/4000	5240/5410	>70	T1	IP66	IK09	8 year
AP-L-VAS-S40-T2W				5160/5320		T2W			
AP-L-VAS-S60-T1	60W	24	3000/4000	6100/6550	>70	T1	IP66	IK09	8 year
AP-L-VAS-S60-T2W				5980/6300		T2W			
AP-L-VAS-S80-T1D	80W	36	3000/4000	9660/10070	>70	T1D	IP66	IK09	8 year
AP-L-VAS-S80-T2D				9340/9840		T2D			

AP-L-VAS-S24

